

System Track & Ring Conditioner

The System Track & Ring Conditioner has been designed to do a 2 step process in 1 step. Using the chiseled harrow tines, the conditioner breaks up clumped/packed footing surfaces. The second step is performed simultaneously by the leveling blade smoothing out the surface resulting in a neat and even footing.

- Easy to use one pass operation
- Removes & conditions footing in corners
- 3 blade sizes - 8', and 6' available
- Standard category 1 – 3 point hitch
- Powder coated paint for increased durability
- 2 way adjustable blade
- 6 depth adjustments

System Track & Ring Pull Behind Conditioner

- Same features as the standard conditioner
- Can be pulled behind large garden tractors, ATV's, cars, trucks and gators
- Wheel kit for travel over grass & driveways
- Blade is adjustable in pitch & angle



System Track & Ring Conditioner




System Track & Ring Pull Behind Conditioner

System Equine
14321 5th Line Nassagaweya
Rockwood ON



QUALITY MANUFACTURING FOR LONG LIFE.

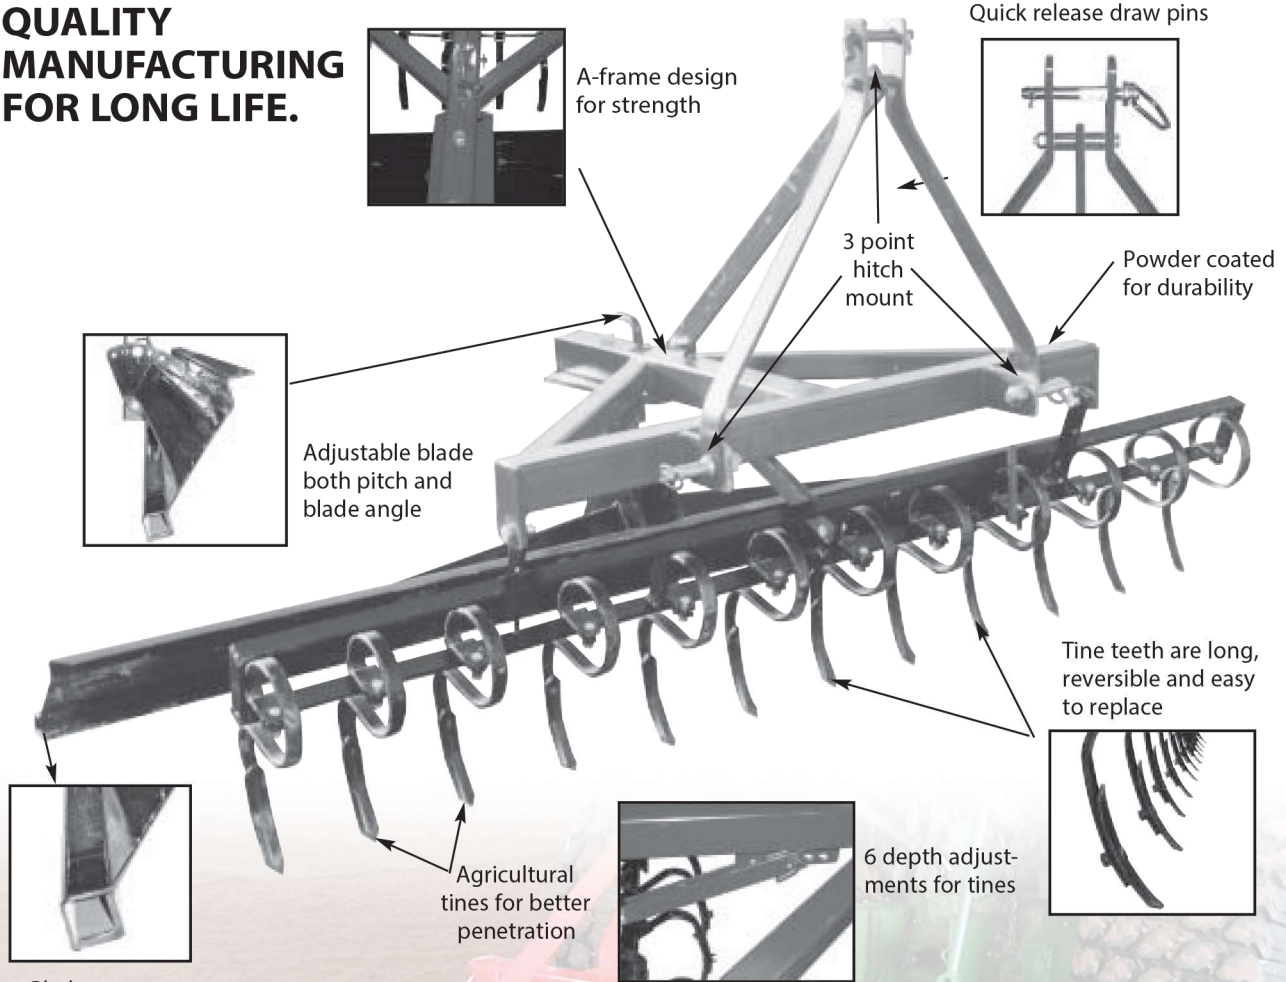

Blade stays at a level plain and floats on footing material keeping the tines at a consistent depth.

SPECIFICATIONS:

Tow Vehical hp15-60
Hitch TypeCat. 1, 3pt

Conditioner:
Blade Length6', 8'
Blade Height12"
Blade Angle3 position
Blade Tilt3 position
Tine Adjustment7 position

General Dimensions:
Overall Length
Overall Width
Overall Height
Weight330lbs

